

NEW with torque
and force sensor

Smart solutions are driven by

LinMot®



Intelligent
assembly with
Linear Rotary Motors
PR02



Intelligent screwing / assembling


Sensitive assembly or screwing with final tolerances in the millimetre range requires a complex, usually external measuring technique for screwing units. The new PR02 Linear Rotary Motor from LinMot already includes everything you need to perform a demanding closing task. In addition to the motors for linear and rotating movements, a torque and force sensor can also be cleverly integrated into the housing as an option.

During the operating process, PR02 Linear Rotary Motors measure all important variables such as linear position, angle of rotation, feed force and torque and control them precisely for the respective application. Cases in which, for example, poorly fitting closures or damaged threads interfere with assembly are detected redundantly by the two servo motors and the respective sensors.

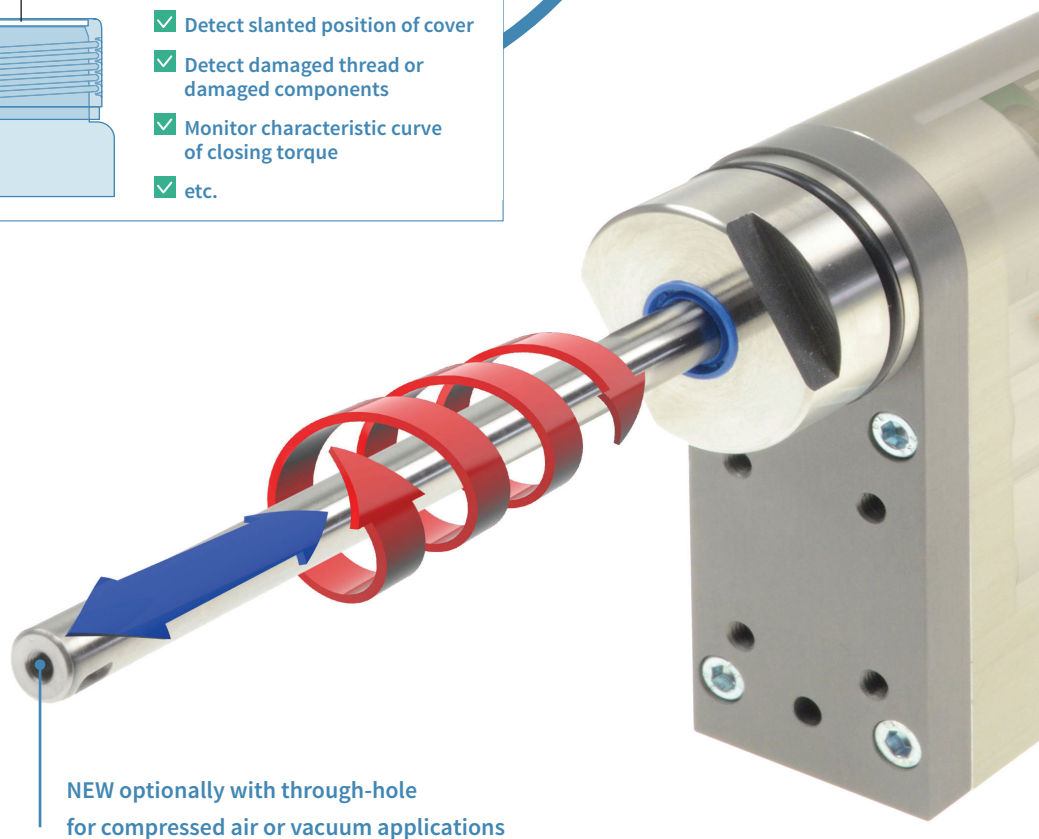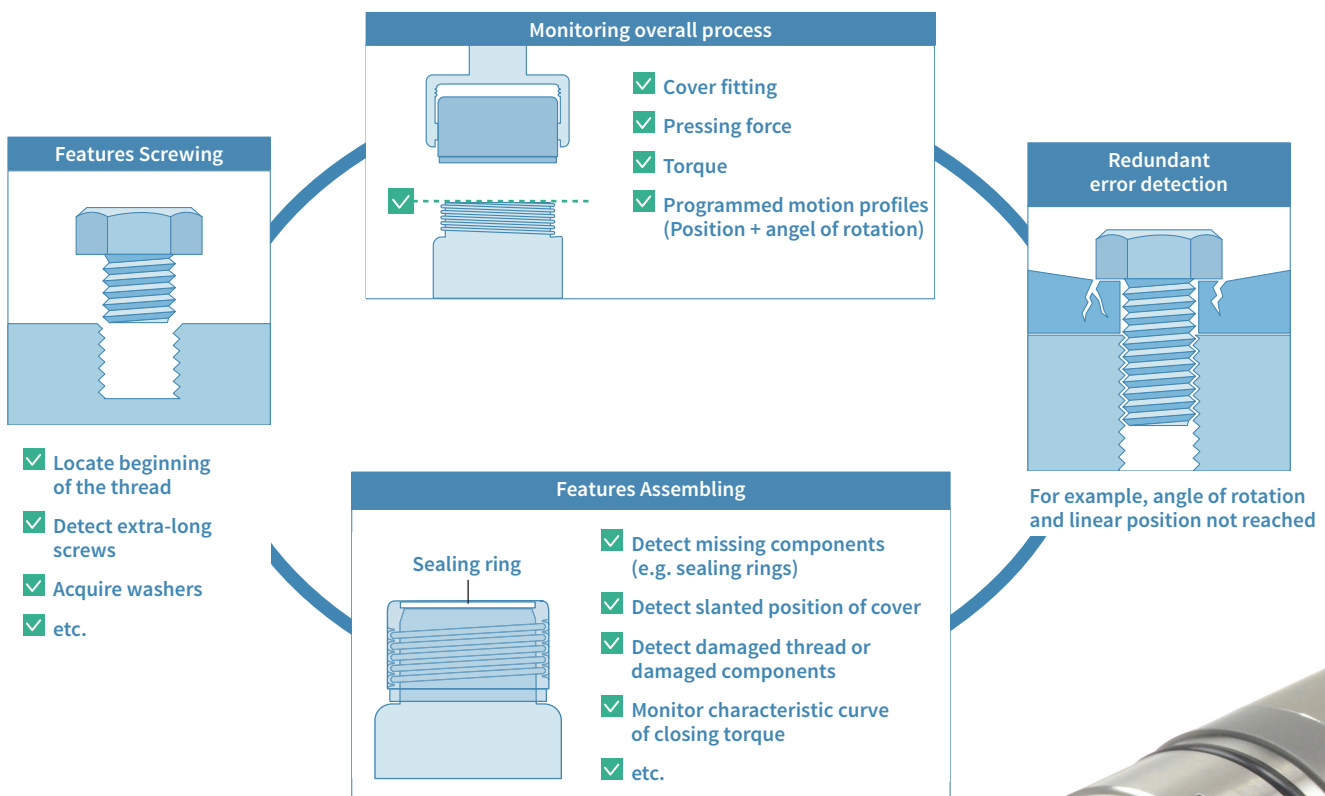

Ready for Industry 4.0

The innovative PR02 delivers all necessary data packages for networked production in the sense of «Industry 4.0». With the help of the drive parameters and the additional sensors that can be integrated, detailed information such as the vertical position, press force or impact force, closing angle and torque are available. In many cases, this information simplifies or completely eliminates the need for time-consuming subsequent inspections. The user has full control over the process quality and can detect deviations at an early stage. In addition, the traceability of every single product in the entire production chain is guaranteed.




PR02 Linear Rotary Motor

The new PR02 motor series is characterised by a new design in which the motors including additional components are integrated in a slim housing. In addition to the linear motor and the rotary motor, further options such as a magnetic spring «MagSpring», a torque and a force sensor can be installed.

The MagSpring ensures that the weight force of the moving load is passively compensated and also prevents the axis from lowering in the currentless state. The torque and force sensor enable precise, reproducible and recordable sealing processes as required, for example, in the pharmaceutical industry.

The user also benefits from the shorter installation length of the entire unit and the hygienic design with easy-to-clean surfaces.

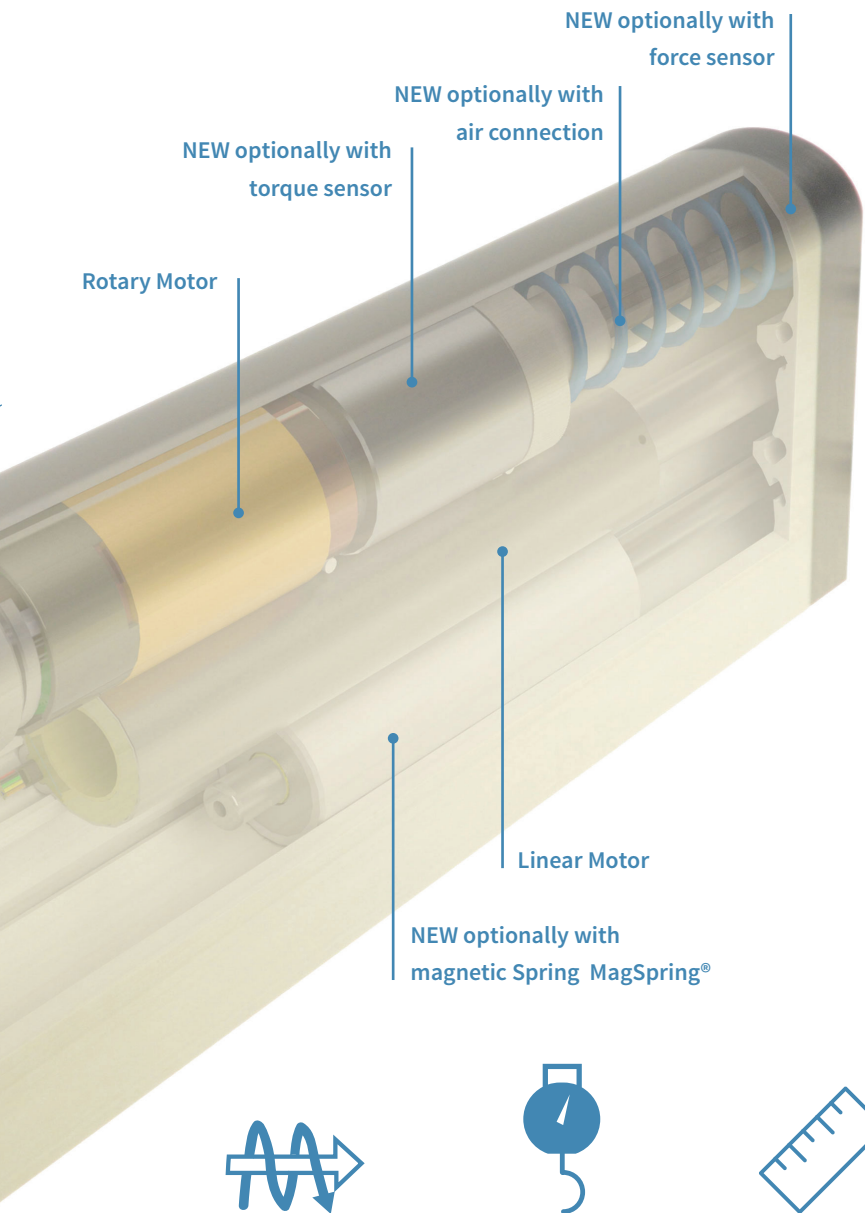

Rotary Motor

NEW optionally with torque sensor

NEW optionally with air connection

NEW optionally with force sensor

Linear Motor

NEW optionally with magnetic Spring MagSpring®



Independent Motion Control



Linear Force Control



Linear Position Control



Rotary Angle Control



Rotary Torque Control

ALL LINEAR MOTION FROM A SINGLE SOURCE

LinMot Europe

NTI AG - LinMot & MagSpring
Bodenaeckerstrasse 2
CH-8957 Spreitenbach
Switzerland

☎ +41 (0)56 419 91 91

☎ +41 (0)56 419 91 92

✉ office@linmot.com

🏠 www.linmot.com

LinMot USA

LinMot USA, Inc.
N1922 State Road 120, Unit 1
Lake Geneva, WI 53147
United States

☎ 262-743-2555

✉ usasales@linmot.com

🏠 www.linmotusa.com

LinMot[®]